


Agilent N8241A Arbitrary Waveform Generator Synthetic Instrument Module 1.25 GS/s or 625 MS/s

Technical Overview



The Agilent Technologies N8241A arbitrary waveform generator (AWG) is capable of creating high-resolution waveforms for radar, satellite, and frequency agile communication systems.

- 15 bits of vertical resolution per channel and either 1.25 Gigasamples per second (GS/s) or 625 Megasample per second (MS/s) provides exceptionally realistic wideband waveforms
- Dual output channels drive both single-ended and balanced designs without the need for baluns or hybrids
- Extended waveform memory and advanced sequencing engine offers long scenario simulations
- Multiple module synchronization provides multi-emitter simulations
- Multiple programmatic interfaces enable easy integration into existing test environments
- Fully compliant to LXI Class A standards 



Agilent Technologies

Generate wide bandwidth AND wide dynamic range signals. simultaneously

Each channel of the N8241A operates at either 1.25 GS/s sample rate (Option 125) or 625 MS/s sample rate (Option 062) and features 15 bits of vertical resolution giving designers the most realistic, wideband waveforms available from a commercial AWG. This LXI synthetic instrument module offers dual differential output channels to drive both single-ended and balanced designs. The AWG also supports advanced sequencing and triggering modes to create event-based signal simulations. Multiple N8241A modules can be synchronized for the generation of phase-coherent, multi-emitter scenarios. Waveform development tasks are simplified using the AWG's numerous programmatic interfaces including complete instrument control from the MATLAB® command line. When the N8241A is combined with a wideband I/Q upconverter, modulation bandwidths of 1 GHz can be realized at microwave frequencies for authentic signal simulations for IF and RF subsystem test.¹

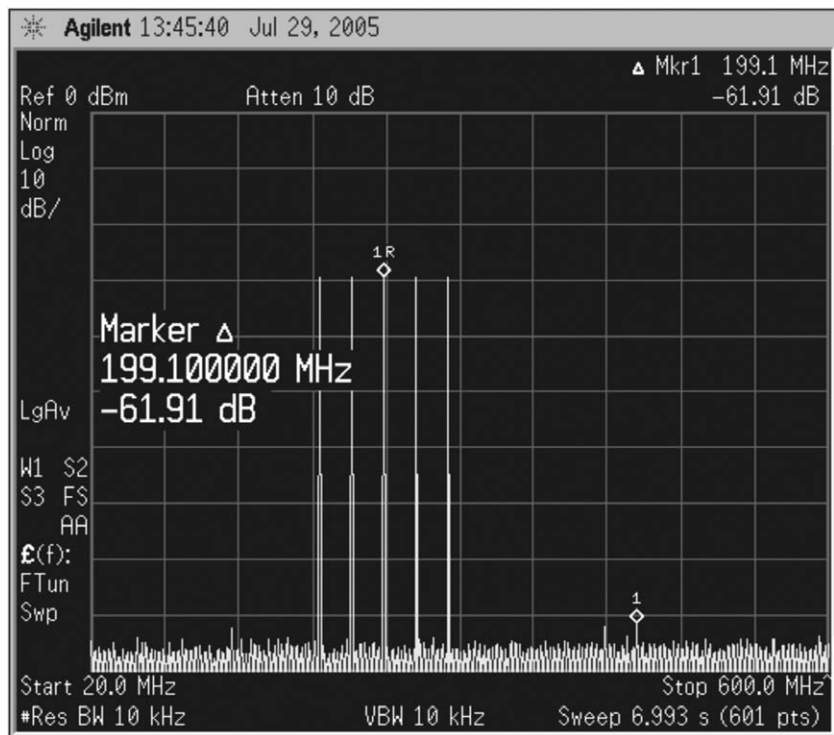


Figure 1. Generate wide band waveforms with unprecedented signal fidelity.

Unprecedented performance

The N8241A gives designers access to the most advanced Digital-to-Analog (DAC) technology available in a commercial AWG. Each module incorporates two high-speed DACs to create 500 MHz of signal bandwidth and ≤ -65 dBc spurious free dynamic range (SFDR) across each channel. Users have the choice of driving their designs differentially from the DAC outputs or single-ended through multiple signal-conditioning paths.

Although some AWGs require users to make a trade-off between the number of output channels and differential outputs, the N8241A provides both – allowing you to drive your designs and eliminating the need for baluns or hybrids in the test path. In addition, each channel can output waveforms as an IF or as a baseband signal for I/Q upconversion.

¹ Agilent E8267D PSG signal generator with Option 016, wideband I/O inputs or Agilent N8211A performance vector upconverter with Option 016; either option could be used.

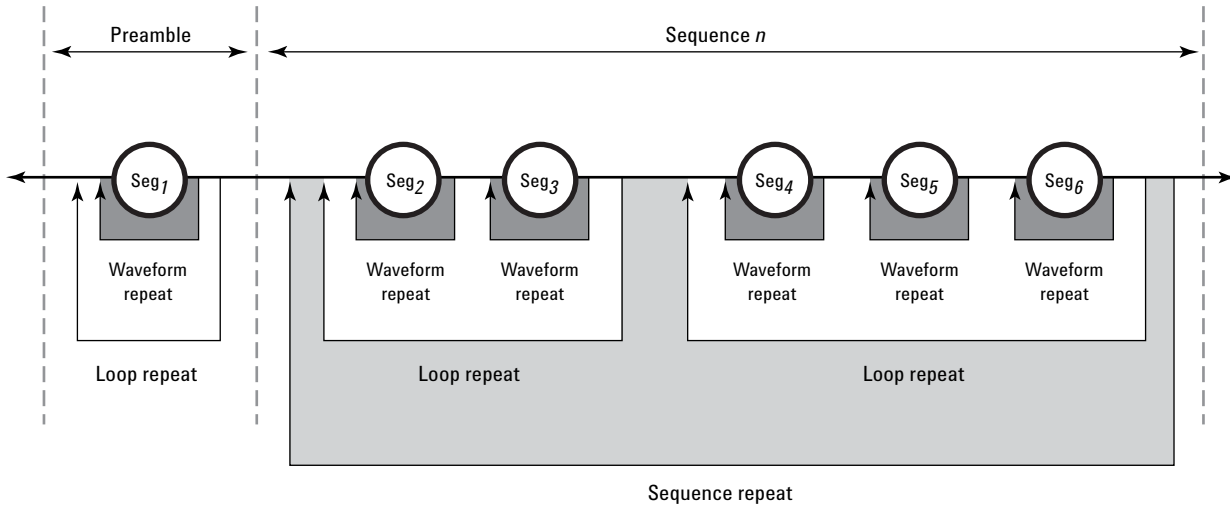


Figure 2. Create sophisticated signal scenarios by looping and nesting waveforms.

Create long scenario simulations

Multiply the effective size of on-board memory through the use of the N8241A's advanced sequencing engine. Uniquely define how waveform segments are played through looping and nesting of stored waveforms. This capability also gives users the ability to create new signals from existing waveforms by playing only subsegments of waveform memory.

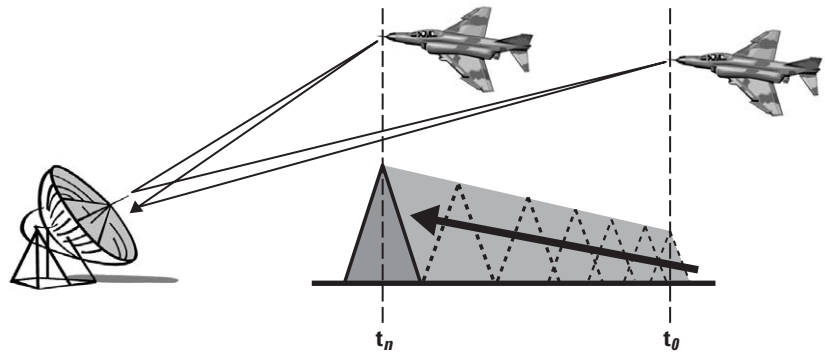


Figure 3. Closing targets can be simulated by ranging parameters on each pulse.

System scalability

Create phase-coherent, multi-emitter simulations using the N8241A's precision SYNC clock. A single N8241A can drive a total of eight AWG modules to synchronize their outputs on a sample-by-sample basis. Any number of modules can be synchronized with simple driver hardware. The AWG also includes multiple front-panel trigger and markers for complete system synchronization.

Ease-of-use

The N8241A's graphical user interface guides developers through module setup and waveform file transfers. Users can quickly configure the instrument's signal conditioning paths, marker and trigger lines, sample and reference clock sources and simple sequencing functions. More sophisticated sequencing functions are available through the instrument's numerous programmatic interfaces. The N8241A supports interfaces for MATLAB, LabView, IVI-C, and VEE framework.



Figure 4. The N8241A's compact modular size is perfect for integrating into ATE system racks.

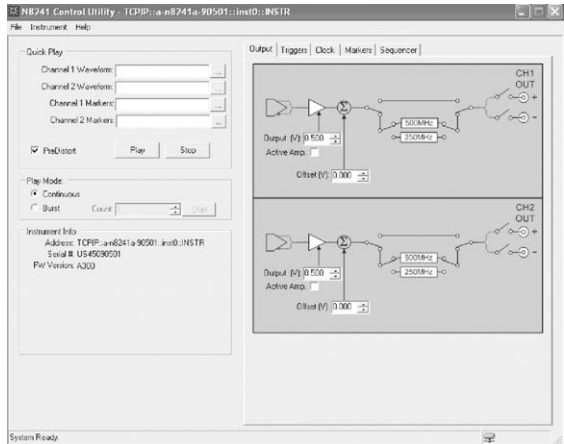


Figure 5. Directly import and play waveforms from the Quick Play menu.

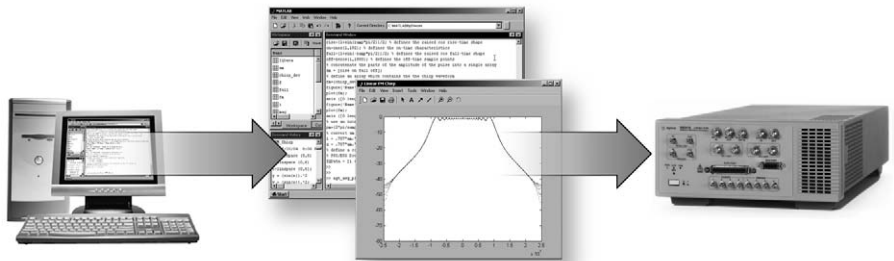


Figure 6. Play waveforms files directly from the MATLAB command line.

New! Enhanced Capabilities for the N8241

Dynamic Sequencing (Option 300)

The dynamic sequencing software enables radar and military communications engineers to build custom signal scenarios on the fly. Engineers can dynamically access up to 16 k of previously stored sequences through a 16-bit interface and replay these complex waveforms to respond to changing threat environments, or to create signals where the next waveform to be played is not known in advance. Option 300 requires a U.S. export license.

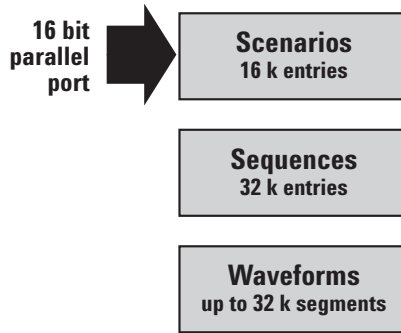


Figure 7. Create signals where the next waveform to be played is not known in advance.

Direct Digital Synthesis (Option 330)

The direct digital synthesis (DDS) software enables radar and emerging communications engineers to create basic waveforms in the AWG's memory and then modify their behavior with profiles for amplitude modulation, phase modulation, and frequency modulation. This enables engineers to simulate testing without the time and expense of field trials, such as in-flight and in-orbit testing. This option can also be used to simulate fading profiles in receiver testing for satellite and 4 G signals, such as multiple input, and multiple output formats (MIMO). Option 330 requires a U.S. export license.

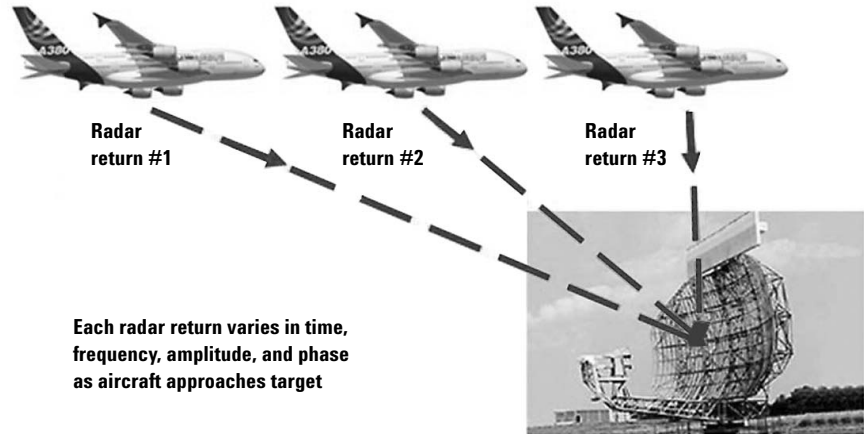


Figure 8. Define signals by carrier frequency and modulation – instant by instant.

Key Characteristics

Channels	Two independent channels available as baseband or IF outputs <ul style="list-style-type: none"> • CH1: Single-ended and differential • CH2: Single-ended and differential 	
Modulation bandwidth	1.25 GS/s sample rate (Option 125) 500 MHz per channel (1 GHz I/Q bandwidth)	625 MS/s sample rate (Option 062) 250 MHz per channel (500 MHz I/Q bandwidth)
Resolution	15 bits (1/32,768 levels)	
Output spectral purity – (CH1 and CH2)	1.25 GS/s sample rate (Option 125) <ul style="list-style-type: none"> • Harmonic distortion: <ul style="list-style-type: none"> ≤ -65 dBc for each channel DC to 500 MHz • Non-Harmonic spurious: <ul style="list-style-type: none"> ≤ -75 dBc for each channel 1 kHz to 500 MHz • Noise floor: <ul style="list-style-type: none"> ≤ -150 dBc/Hz across the channel bandwidth 	625 MS/s sample rate (Option 062) <ul style="list-style-type: none"> • Harmonic distortion: <ul style="list-style-type: none"> ≤ -65 dBc for each channel DC to 250 MHz • Non-Harmonic spurious: <ul style="list-style-type: none"> ≤ -75 dBc for each channel 1 kHz to 250 MHz • Noise floor: <ul style="list-style-type: none"> ≤ -150 dBc/Hz across the channel bandwidth

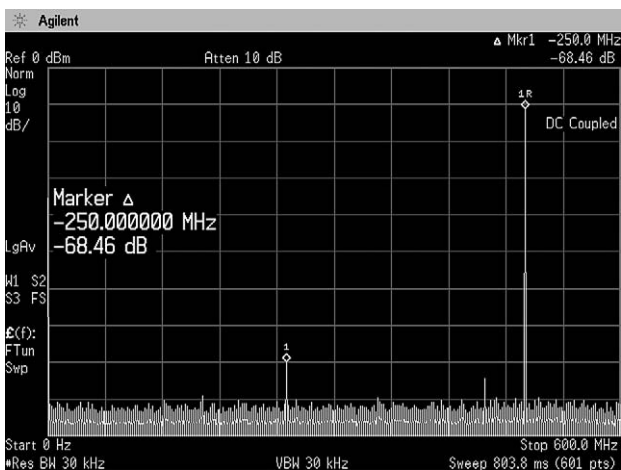


Figure 9. Excellent harmonic and spurious performance are available across the full bandwidth of each channel.

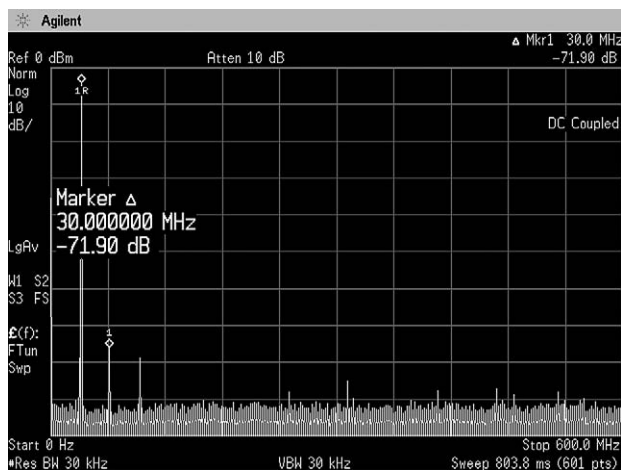


Figure 10. Spurious performance outstanding at low signal frequencies.

Key characteristics continued

Sample clock	
Internal	Fixed 1.25 GS/s (Option 125) Fixed 625 MS/s (Option 062)
Internal clock output	+3 dBm nominal
External clock input	Tunable 100 MS/s to 1.25 GS/s (Option 125) Tunable 100 MS/s to 625 MS/s (Option 062)
External clock input drive level	+5 to –15 dBm typical
Phase noise characteristics	1 kHz: –95 dBc/Hz 10 kHz: –115 dBc/Hz 100 kHz: –138 dBc/Hz 1 MHz: –150 dBc/Hz
Noise floor	–150 dBc/Hz
Accuracy	Same as 10 MHz timebase input
Frequency reference	
Input drive level	+2 to +12 dBm into 50 ohms (+2 dBm nominal)
Waveform length	8 MS per channel (16 MS with Option 016)
Minimum waveform length	128 samples
Waveform granularity	8 samples
Segments	1 to 32 k unique segments can be defined consisting of waveform start and stop address, repetitions, and marker enable flags.
Segment loops	A total of 1 million (2^{20}) loops can be defined for each segment. Loops can be configured to advance in one of four modes: <ul style="list-style-type: none">• Single: The segment loop plays once and waits at the end of the loop for a trigger.• Continuous: Segment loop is repeated continuously until a trigger is received.• Auto: Automatically advances to the next segment after completing the specified number of loop repetitions.• Repeat: The waveform loop repeats until the number of waveform loop repetitions is met.
Sequences	Up to 32 k total unique waveform sequences can be defined. A sequence is a contiguous series of waveform segments.
Advanced sequencing	Enables users to build and playback scenarios, which are comprised of one or more sequences.
Scenarios	1 to 16 k pointers can be assigned to play pre-defined sequences. Sequence play begins with the first sequence entry and continues uninterrupted until the last entry is played. The table repeats until stopped.

Key characteristics continued

Sequence jump modes	<p>Sequence jumps determine how a sequence responds to a jump trigger. There are no discontinuities in a sequence jump other than those imposed by the waveform data. Three modes are available to control sequence jumps:</p> <ul style="list-style-type: none">• Jump immediate: Jumps immediately to the next specified sequence address with a fixed latency.• End of waveform: The current segment (including waveform repeats) is completed before jumping to a new sequence.• End of sequence: The current sequence is completed before jumping to a new sequence. Jump latency is the longer of either the jump immediate latency or the length of the remaining sequence.
---------------------	--

Dynamic Sequencing (Option 300)

Input	20-pin mini-D connector
Input levels	All pins configured as 2.5 volt LVCMOS inputs. A logic low must fall within the –0.2 to +0.5 volt window. A logic high must be within the window of +2.0 to +2.8 volts.
Number of address bits	13 bits per channel
Total number of addressable scenarios	16 k
Data rate for dynamic data	100 ns
Data latency	Same as front panel trigger inputs. Software pointers may also be used to point to pre-defined scenarios, though latencies are not deterministic.

Direct Digital Synthesis (Option 330)

Output frequency resolution	1 Hz
Frequency modulation	Deviation from 0 to 125 MHz (250 MHz peak-peak)
Phase modulation	Deviation from –180 to +180 degrees in 0.022 degree steps
Amplitude modulation	Modulation depth from 0 to 100% with 15 bit resolution
Single channel bandwidth	400 MHz (800 MHz I/Q)

Key characteristics continued

External triggers

Number of inputs	8 each (4 SMB female front-panel connectors plus four software triggers over the LXI interface from host processor)	
Trigger polarity	Negative/positive	
Trigger impedance	2 k ohms	
Maximum input level	±4.5 volts	
Input sensitivity	250 mV	
Trigger threshold	−4.3 volts to +4.3 volts	
Trigger timing resolution	Clock/8 (6.4 ns at 1.25 GS/s rate) (Option 125)	Clock/8 (12.8 ns at 625 MS/s rate) (Option 062)
Trigger latency	34 x clock/8 (217.6 ns at 1.25 GS/s rate) (Option 125)	34 x clock/8 (435.2 ns at 625 MS/s rate) (Option 062)
Trigger uncertainty	< 50 ps	
Minimum trigger width	12.8 ns at 1.25 GS/s clock rate (Option 125)	25.6 ns at 625 MS/s clock rate (Option 062)
Trigger delay	Programmable from 1 to 256 sync clock cycles with 1 sync clock cycle resolution ¹	

LXI triggering modes

Driver command based	A driver interface on the controlling computer is used to directly transmit a command to the module.
Direct LAN messaging	A data packet containing triggering information (including a time stamp) is sent directly from one module to another via the LAN.
Time based events	An IEEE 1588 based time trigger is set and executed internally in a module.
LXI trigger bus-based	A module function is triggered via a voltage on the LXI trigger bus.

The LXI triggering conforms to the specifications of the LXI standard, revision 1.0, www.lxistandards.org

¹ A sync clock cycle is clock/8

Key characteristics continued

External markers

Markers	Can be defined for each waveform segment.	
Number of outputs	4 each SMB female	
Marker polarity	Negative, positive	
Output impedance	50 ohms	
Marker low level	100 mV nominal into high impedance load	
Marker high level	3.2 volts nominal into high impedance load	
Marker timing resolution	Clock/8 (6.4 ns at 1.25 GS/s rate) (Option 125)	Clock/8 (42.8 ns at 625 MS/s rate) (Option 062)
Marker latency	Marker precedes analog output and is adjustable in 2 sample clock period steps.	
Marker latency repeatability	<100 ps	
Marker width	Programmable from 1 to 256 sync clock cycles ¹	
Marker delay	Programmable from 8 to 502 sample clock cycles, with 2 sample clock cycle resolution	
LXI markers	Two LXI markers are available	
Module synchronization	Supports system scaling for any number of N8241A modules. A single module can support a fan-out of 8 N8241A modules for precise triggering and repeatability. Driver boards may be used to scale any number of modules.	
Sync clock output level	800 mV p-p (50 ohms, AC coupled)	
Sync clock input sensitivity	100 mV p-p minimum into 50 ohms AC coupled	

Analog output

Output connector	SMA female		
Output impedance	50 ohms		
Analog output levels	The following output levels are specified into 50 ohms		
		Single-ended	Differential
	Passive mode	0.5 V _{p-p}	N/A
	Active mode	1 V _{p-p} with ±0.2 V offset	N/A
	Direct DAC mode	N/A	1 V _{p-p} (0 volt offset)
Uncorrected passband flatness	±1 dB DC - 200 MHz; ±2.5 dB DC - 500 MHz (with 1.25 GHz clock)		
Uncorrected passband group delay	±500 ps DC - 200 MHz; ±1 ns DC - 500 MHz (with 1.25 GHz clock)		
Reconstruction filters	500 MHz and 250 MHz realized as 7-pole Cauer Chebychev filters plus thru-line output		
Pulse response	Rise time (10 to 90%): < 1 ns Fall time (10 to 90%): < 1 ns Amplitude: 0.5 V _{p-p}		

¹ A sync clock cycle is clock/8

General Characteristics

LXI Class A Certified

Power

Line power	100/120/220/240 VAC, 50/60 Hz, 100 watts maximum
------------	--

Environmental

Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to temperature, humidity, shock vibration, altitude, and power line conditions. Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.

Operating temperature	0 to +50 degrees C (0 to 47 degrees C at 15,000 ft altitude)
-----------------------	--

Storage temperature	-40 to +70 degrees C
---------------------	----------------------

Relative humidity

Type tested:	0 to 95% at 40 degrees C (non-condensing)
--------------	---

Altitude	0 to 4500 m (15,000 ft) above sea level
----------	---

Weight

5.66 kg (12.5 lb)

Security

All user data stored in volatile memory

Dimensions

Height:	89 mm (3.5 inch)
---------	------------------

Width:	213 mm (8.375 inch)
--------	---------------------

Depth:	422 mm (16.625 inch)
--------	----------------------

Recommended calibration cycle

12 months

ISO compliance

This instrument is manufactured in an ISO-9001 registered facility in concurrence with Agilent Technologies, Inc. commitment to quality.

- Electrostatic Discharge Immunity – IEC 61000-4-2: passes criterion C

Testing according to IEC 61000-4-2: showed that the exposure of the data port to electrostatic discharge may interrupt operation of the N8241A/42A. Operation can be restored by reloading the desired waveforms and restarting. This required operator intervention results in a criterion C classification.

Ordering Information



Figure 11. Agilent N8241A 15-bit arbitrary waveform generator LXI module

N8241A 15-bit arbitrary waveform generator with 8 MS memory per channel

Options

N8241A-125	1.25 GS/s sample rate
N8241A-062	625 MS/s sample rate
N8241A-016	Waveform memory expansion to 16 MS per channel
N8241A-300	Enabling software for 16-bit dynamic sequencing (requires U.S. export license)
N8241A-330	Direct digital synthesis software (requires U.S. export license)

Web Resources

Visit our web sites for additional product information and literature.

N8241A 15-bit arbitrary waveform generator:

www.agilent.com/find/synthetic

N6030A Series of arbitrary waveform generators:

www.agilent.com/find/awg

Signal simulation systems:

www.agilent.com/find/signalsimulation

Aerospace and defense test and measurement products and services:

www.agilent.com/find/ad

Test and measurement accessories:

www.agilent.com/find/accessories



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.



www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.



www.lxistandard.org

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

www.agilent.com

Online assistance:

www.agilent.com/find/synthetic

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

North America

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	81 426 56 7832
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe

Austria	0820 87 44 11
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700
Germany	01805 24 6333* *0.14 /minute
Ireland	1890 924 204
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland (French)	44 (21) 8113811(Opt 2)
Switzerland (German)	0800 80 53 53 (Opt 1)
United Kingdom	44 (0) 7004 666666

Other European Countries:

www.agilent.com/find/contactus

Revised: March 24, 2007

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006, 2007
Printed in USA, April 11, 2007
5989-2595EN



Agilent Technologies